

## Chapter 6: Checklist regarding installation

### 6.1 Checklists prior to completion of TECDIS installation.

Item:	Task to be performed:	OK:	Comments
1	Verify that all selected ports are receiving/transmitting data, and that ports have been given names on both main and back-up TECDIS. Names shall be according to the data they are receiving/transmitting.		
2	Verify that sensor data is correctly distributed between main and back-up TECDIS (NMEA server program).		
3	Verify that one single action do not result in loss of position on both main and back-up TECDIS.		
4	Verify that main and back-up TECDIS and respective equipment are connected to a proper UPS.		
5	Verify that boat size are correct compared to chart on both main and back-up TECDIS.		
6	Perform monitor color calibration on main and back-up TECDIS.		
7	Verify that alarm function on both main and back-up TECDIS is working properly.		
8	Check that TECDIS transmits alarm to external systems.		
9	If installed, verify generation of conning picture and correct display of sensor data on conning monitor (check against engine telegraph, speed repeaters, gyro repeaters etc)		
10	Verify audible signal from alarm speaker on TECDIS		
11	Verify sensor data (correct size of vessel etc) is filled in on main and back-up TECDIS.		
12	Verify that back-up of default setup values have been performed (save setup default values) on main and back-up TECDIS.		
13	Verify that installed charts have been correctly installed on both main and backup TECDIS (if installed), and that charts license matches.		
14	Unplug TECDIS USB-key, restart TECDIS to verify it starts up in normal mode (chart program starts automatically) and boat symbol and sensor data are displayed.		
15	Fill in hardware/software fact sheet and file it in ships documents and in technician personal files.		

Item:	Hardware	Model/type:	Serial no.
1	Keyboard Main		
2	Keyboard Back-up		
3	Processor Main		
4	Processor Back-up		
5	Telchart alarm interface		
6	Trackball Main		
7	Trackball Back-up		
8	Analog signal collector		
9	Monitor Main		
10	Monitor Back-up		
11	Conning monitor		
12	Alarm loudspeaker		
13	MOXA interface		
14	Additional units		
15	Additional units		
16	Additional units		

Item:	Software	Version:	Description:
1	TECDIS Main		
2	TECDIS Back-up		
3	C-Map SDK Main		
4	C-MAP SDK Back-up		
5	Additional software		
6	Additional software		
7	Additional software		

Item:	License	Number:	Description:
1	TECDIS license # Main		
2	TECDIS license # Back-up		

**NB: License for charts is not possible to list, as there is one license per chart.**

## **6.2 Checklists prior to completion of TECDIS TC and TECDIS AW installation.**

If installation includes Track Control functionality, the following tests must be performed.

### **TECDIS 1 and 2**

<b>No.</b>	<b>Function</b>	<b>Requirement</b>	<b>Results</b>
<b>Harbor Acceptance Test (15 minutes)</b>			
1	External data	Go to setup menu and verify NMEA inputs are valid. Check input values for position and course.	TECDIS 1: <input type="checkbox"/> Good <input type="checkbox"/> NG <input type="checkbox"/> N/A TECDIS 2: <input type="checkbox"/> Good <input type="checkbox"/> NG <input type="checkbox"/> N/A
2	External data	Verify that TECDIS receives valid sensor data from a minimum of: <ul style="list-style-type: none"> <li>• Two independent positioning sensors</li> <li>• Two independent heading sensors</li> <li>• A speed sensor</li> </ul>	TECDIS 1: <input type="checkbox"/> Good <input type="checkbox"/> NG <input type="checkbox"/> N/A TECDIS 2: <input type="checkbox"/> Good <input type="checkbox"/> NG <input type="checkbox"/> N/A
3	Alarm system	Verify that TECDIS is connected to a separate alarm system.	TECDIS 1: <input type="checkbox"/> Good <input type="checkbox"/> NG <input type="checkbox"/> N/A TECDIS 2: <input type="checkbox"/> Good <input type="checkbox"/> NG <input type="checkbox"/> N/A
4	System status	Check that no alarms/warnings are pending in alarm window.	TECDIS 1: <input type="checkbox"/> Good <input type="checkbox"/> NG <input type="checkbox"/> N/A TECDIS 2: <input type="checkbox"/> Good <input type="checkbox"/> NG <input type="checkbox"/> N/A
5	Chart database	1,Select setup menu, chart utilities, chart licenses 2,Verify that licenses are valid for intended voyage 3,Click C-Map chart update 4,Verify that charts are updated in update log	TECDIS 1: <input type="checkbox"/> Good <input type="checkbox"/> NG <input type="checkbox"/> N/A TECDIS 2: <input type="checkbox"/> Good <input type="checkbox"/> NG <input type="checkbox"/> N/A
<b>Sea Trial Test (15 minutes)</b>			
6	AIS and ARPA Targets (If present)	1,Activate ARPA on radar and select a target. 2,Click the symbol button of [ARPA Targets]. 3,Click the symbol button of [AIS Targets]. AIS and ARPA Targets are displayed on the top of charts.	TECDIS 1: <input type="checkbox"/> Good <input type="checkbox"/> NG <input type="checkbox"/> N/A TECDIS 2: <input type="checkbox"/> Good <input type="checkbox"/> NG <input type="checkbox"/> N/A
7	Conning display (If present)	Correct indication is shown at the each configured window on the Conning Display. Verify that selected sensors used by heading, position is correctly indicated.	TECDIS 1: <input type="checkbox"/> Good <input type="checkbox"/> NG <input type="checkbox"/> N/A TECDIS 2: <input type="checkbox"/> Good <input type="checkbox"/> NG <input type="checkbox"/> N/A

8	Route Monitoring	<p>Before start TEST, routes must be created or transferred from other TECDIS:</p> <ol style="list-style-type: none"> <li>1, Press the [Plan] key, icon with number 1 indicated is active. This means primary route will be selected. Choose a route with boathook icon.</li> <li>2, Press [YES] icon to activate route.</li> <li>3, Route is then shown on displayed charts.</li> <li>4, To display secondary route choose icon with button 2 indicated. Repeat procedure as for primary route.</li> <li>5 To exchange primary and secondary route, press icon with 1↔2 indicated.</li> <li>6. Observe that correct warnings is activated as appropriate.</li> <li>7. Click alarm icon for display of alarms and warnings on route.</li> <li>8. Test that activating track steering is successful.</li> </ol>	<p>TECDIS 1:</p> <p><input type="checkbox"/>Good <input type="checkbox"/>NG <input type="checkbox"/>N/A</p> <p>TECDIS 2:</p> <p><input type="checkbox"/>Good <input type="checkbox"/>NG <input type="checkbox"/>N/A</p>
9	Radar overlay (If present)	<p>Check that radar overlay from radar is displayed on display after pressing radar overlay icon.</p>	<p>TECDIS 1:</p> <p><input type="checkbox"/>Good <input type="checkbox"/>NG <input type="checkbox"/>N/A</p> <p>TECDIS 2:</p> <p><input type="checkbox"/>Good <input type="checkbox"/>NG <input type="checkbox"/>N/A</p>
10	Aids to navigation	<p>Verify that TECDIS handle different functions like;</p> <ol style="list-style-type: none"> <li>1. Disconnect position sensors and observe dead reckoning performance, verify that alarm is given: pos sensor ½ lost.</li> <li>2. Activate track dialog and set past tracks visible by clicking on “show” icon.</li> <li>3. Enter manual fix, by activating “bearing” icon. Click on center button on mouse when mouse is in position of visual object. Use observed gyro bearing to make a red line in chart towards estimated position. Repeat procedure to make two lines resulting in a cross bearing.</li> <li>4. Update charts, enter chart utilities menu, choose C-Map charts update. Use semi-auto update. Create a update request file on memory stick. Send file to <a href="mailto:updates@c-map.no">updates@c-map.no</a> and load received file into TECDIS. Update loaded successfully shall be presented when update is completed.</li> <li>5. Activate a route in route menu. To alter at route underway, click on “Edit” icon in route menu. Modify route and click on “OK” icon. Route is now altered. When at track steering mode, 3 waypoints are not allowed to alter, last waypoint, next waypoint and waypoint after next.</li> <li>6. Manual adjustment for position is available in setup menu, click on “nav. position offset” icon and a dialog box appear in top right corner of map. Enter offset values as appropriate.</li> </ol>	<p>TECDIS 1:</p> <p><input type="checkbox"/>Good <input type="checkbox"/>NG <input type="checkbox"/>N/A</p> <p>TECDIS 2:</p> <p><input type="checkbox"/>Good <input type="checkbox"/>NG <input type="checkbox"/>N/A</p>

### Anschütz NP 2025 PLUS Adaptive Autopilot

No.	Function	Requirement	Results
<b>Harbor Acceptance Test (15 minutes)</b>			
1	External data	Correct number is shown at each box of below. "Heading", "Speed"	<input type="checkbox"/> Good <input type="checkbox"/> NG <input type="checkbox"/> N/A
2	Heading Control	1.[HEADING CONTROL] is activated when steering mode switch is set to "auto". Present heading is displayed in heading display and in preset heading display. Present heading is activated as set heading. 2. Verify parameter settings for rudder, yawing, counter rudder, rudder limit, ROT limit and radius value. Verify mode of heading change, radius or R.O.T. mode by observing key lamp. 3. Alter set course by either turn knob and push set button to acknowledge or push and turn knob. Observe correct rudder response. 4. Observe rudder movement. 5. Observe that max rudder limit is not exceeded.	<input type="checkbox"/> Good <input type="checkbox"/> NG <input type="checkbox"/> N/A
3	Steering Control	1,Rudder moves to 10 degrees PORT when SET HEADING is set by 20 degrees below Gyro heading. 2,Confirm the actual rudder angle by rudder angle indicator.	<input type="checkbox"/> Good <input type="checkbox"/> NG <input type="checkbox"/> N/A
4	Function	1. Change operating mode from hand to heading control at Track Control TECDIS , verify that correct mode is indicated on TECDIS and conning monitor also. 2. Shift from heading control to manual mode by switching steering mode selector. Verify that change to manual mode is possible from all modes with a single operator action.	<input type="checkbox"/> Good <input type="checkbox"/> NG <input type="checkbox"/> N/A
5	Function	1. Change set course 50 deg to starboard, off-heading alarm not to be activated during setting of new course. Alarm is deactivated for a time period that is a function of present course and new desired course.	<input type="checkbox"/> Good <input type="checkbox"/> NG <input type="checkbox"/> N/A
6	Function	Test override tiller in modes: hand, heading control and track control. Autopilot to go to hand	<input type="checkbox"/> Good <input type="checkbox"/> NG <input type="checkbox"/> N/A
<b>Sea trial test (240 minutes)</b>			
1	Heading Control	Response and stability of "Heading Control" steering. 1,Observed overshooting should max 2 deg on 10 deg course change and max 5 deg on 60 deg course change. 2,Repeat another side course change with same value.  Starboard 10 deg turn with NAV FULL speed (If available). Port 10 deg turn with NAV FULL speed (If available). Starboard 60 deg turn with NAV FULL speed. Port 60 deg turn with NAV FULL speed.  Tests to be repeated with half speed ahead.	<input type="checkbox"/> Good <input type="checkbox"/> NG <input type="checkbox"/> N/A
2	EMC	Testing of interference of radio transmissions while in heading control, observe system while: 1. Transmitting a call with FS-2570 2. Transmitting a call with VHF's 3. Transmitting a message with Felcom-15 1&2 4. Transmitting a call with Felcom-70	<input type="checkbox"/> Good <input type="checkbox"/> NG <input type="checkbox"/> N/A
2	Track Control Steering	Steering function test should be performed as follow in the next lists <b>"Track Control Test "</b> and <b>"Fail to Safe Properties"</b>	<input type="checkbox"/> Good <input type="checkbox"/> NG <input type="checkbox"/> N/A


### Track Control System Test

Items to be checked during sea trial

No.	Item	Content	Result	Remarks
1		The following units have to be tested prior to the Track Control test: ECDIS AUTOPILOT STEERING GEAR		
2	Route	Create a test route for Track Control in keeping with the vessel maneuverability as per shown example attached (or import by file).		
3	Route monitoring	<ol style="list-style-type: none"> <li>1. Enter route menu, check that icon “1” is activated (primary route). Use boathook to select route from previous test item. Click yes when asked to activate route.</li> <li>2. Check that route monitoring parameters are shown in right menu (XTE, next waypoint info etc. )</li> </ol>		
4	Track keeping	<ol style="list-style-type: none"> <li>1. Check that ship follows the test route selected on ECDIS. *Recommend test speed is normal sea speed</li> <li>2. Check performance according item 1 with speed reduction applied in one turn.</li> <li>3. Check performance according item 1 with inducing current effect by using bow thruster during turn.</li> </ol>		
5	Alarms	<ol style="list-style-type: none"> <li>1. Set WP pre-warning and WP approach time on the ECDIS as per drawing below. Verify that WP approach Alarm is generated when the ship approaches the WP.</li> <li>2. Verify that separate Alarm system activates back-up navigator alarm when WP pre-warning and WP alarm on ECDIS is not acknowledged.</li> <li>3. Set alarm for gyro mismatch to minimum in TECDIS Setup program. Wait for alarm to be raised.</li> <li>4. Activate route and use “Heading Control” mode on autopilot. Steer outside channel limit to generate XTE alarm.</li> <li>5. Set “Heading off” alarm low and use bow thruster to provoke a heading drift. Verify that</li> </ol>		

	alarm is raised.		
--	------------------	--	--


Example of route for Track Control testing

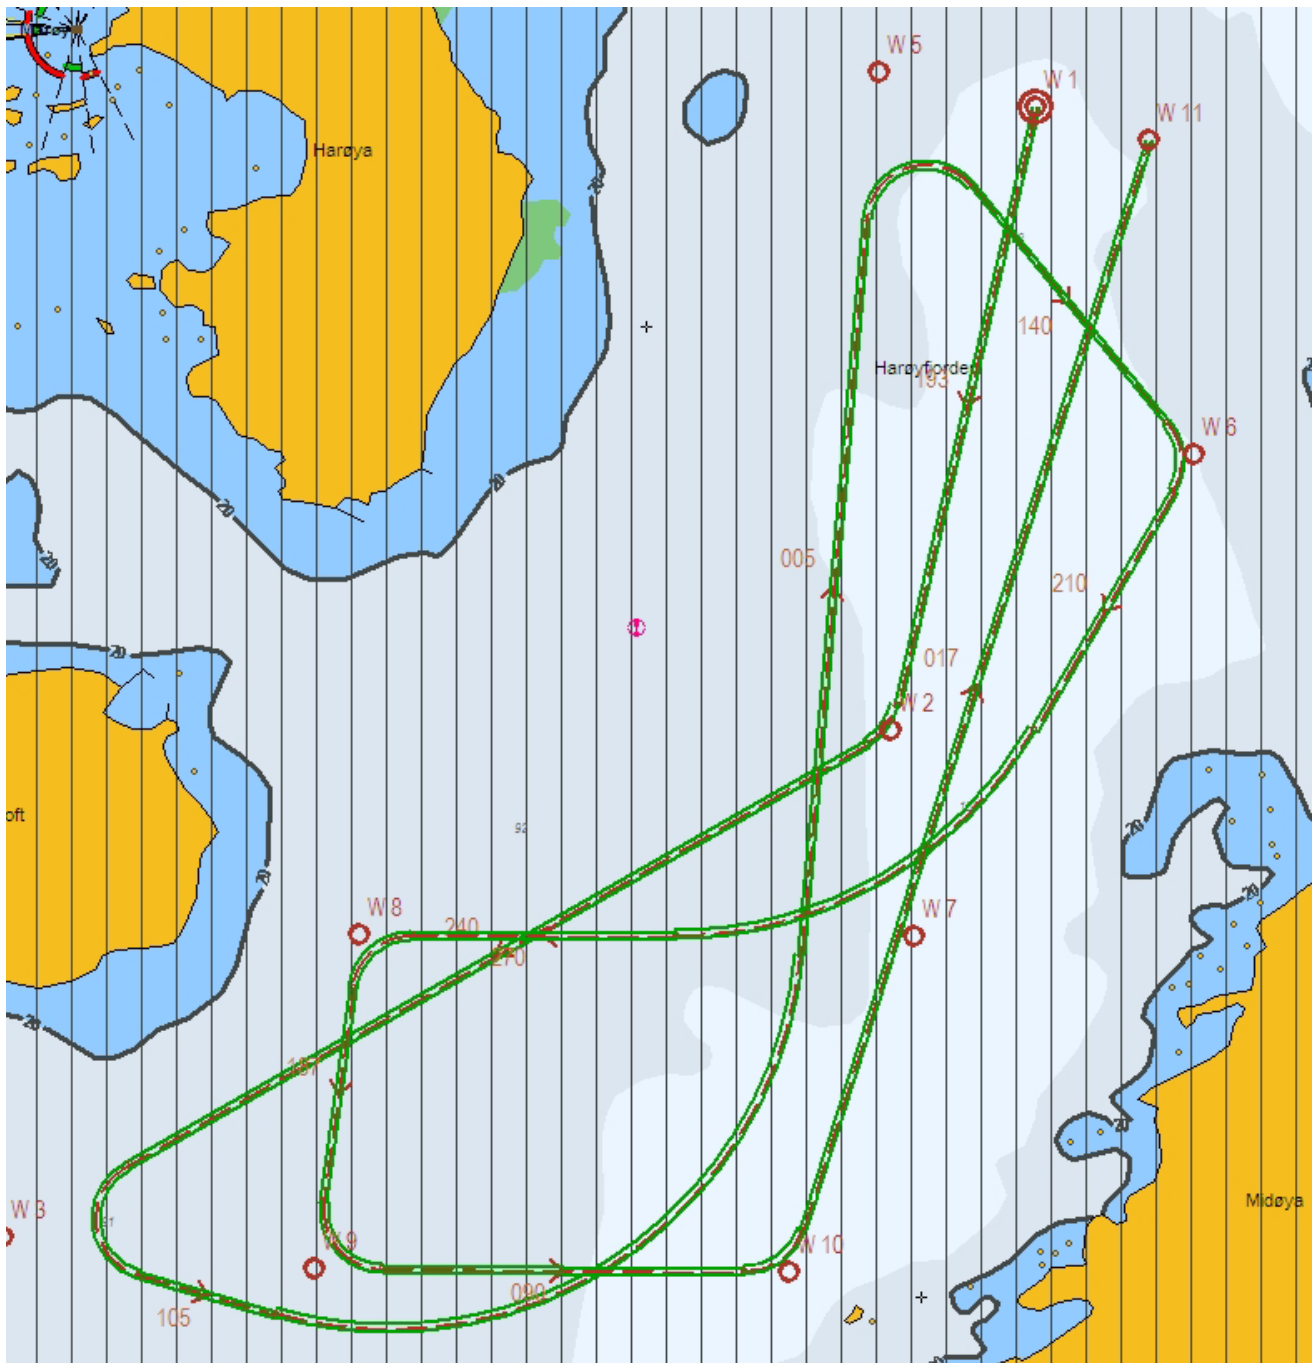

WPT 3: 135 deg turn port, WPT 5: 135 deg turn starboard (both with minimum radius\*)

WPT 4: 60 deg turn port, WPT 7: 60 deg turn starboard (both with 2 NM radius)

\* Minimum radius to be settled after calculations from yard.

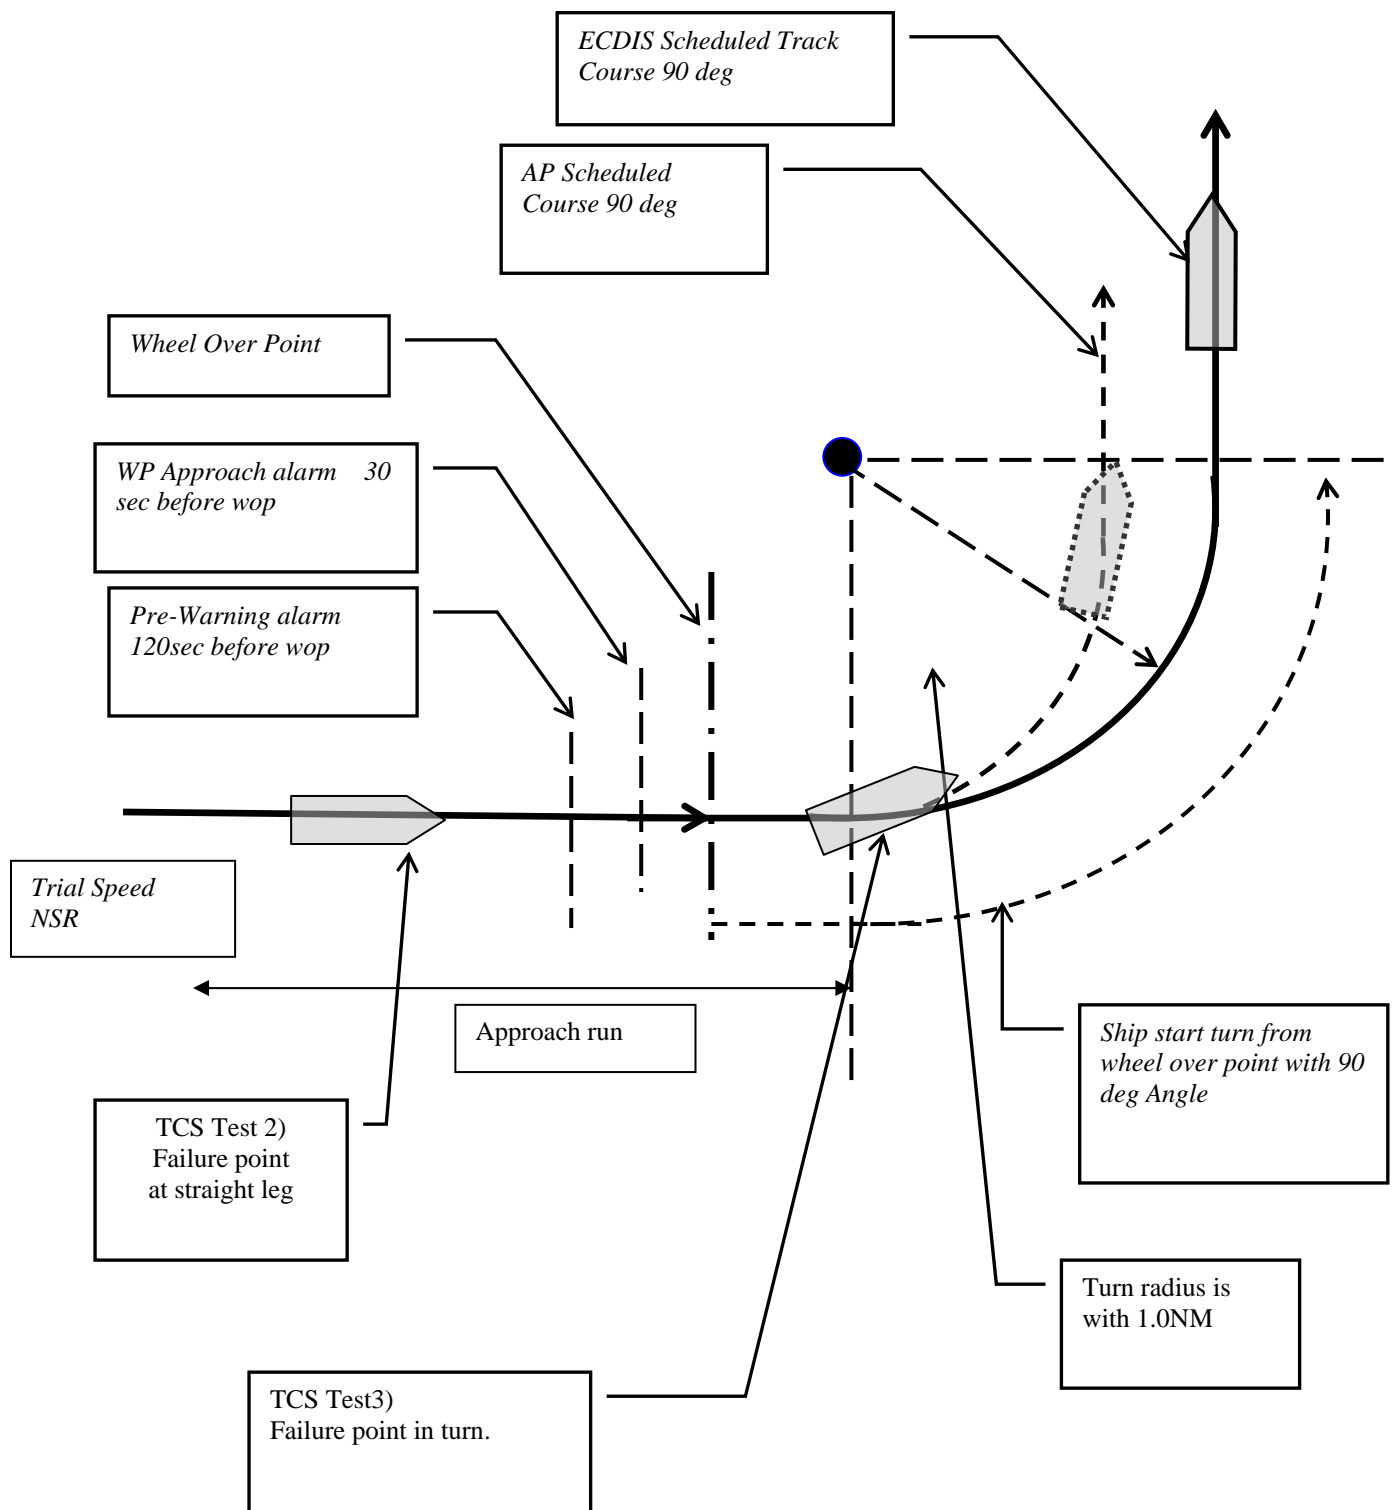



### Fail to Safe Properties

Item	Fail	Track Control (TCS)	Test	Result
1	Position sensor antennas to be blinded off.	When either of position sensor acquisition stops, TCS emits alarm but continues to function utilizing acquired position from other position sensor, LOG, and GYRO. When both position sensor acquisition stops, TCS emits alarm but begins navigation utilizing estimated position made available by LOG and GYRO. Then it (after 10min) automatically switches to Radius mode and manual maneuver will be in effect.	Remove No.1 position sensor antenna  Remove No.2 position sensor antenna	
2	Disconnect position sensor on a straight leg.	Same as above	Remove No.1/2 position sensor	
3	Disconnect position sensor during max radius turn.	Alarm will be emitted only from ECDIS which places no influence on TCS function.	Remove No.1 position sensor output connector during maximum radius turn.	
4	Turn Heading Control System rudder limit to min value during min radius turn.	Not available.	Adjustment of rudder limit is not available.	
5	Disconnect serial link to heading controller during straight leg.	Emits alarm and stops TCS function simultaneously. It automatically switches to Radius mode and manual maneuver will be in effect.	Remove Track Control connection from ECDIS while sailing straight ahead.	
6	Disconnect serial link to heading controller during turn.	Emits alarm and stops TCS function simultaneously. Automatically switches to Radius mode and manual maneuver will be in effect after turning to the pre-determined maximum degree.	Remove signal cable exclusively in use for Auto Pilot outputted from ECDIS while turning.	
7	Disconnect speed log during straight leg/ or turn.	Although emits alarm, two position sensor data inputted maintains the normal function.	Remove LOG input outputted to ECDIS while turning.	
8	Simulate failure in ECDIS.	Same as item 5 or 6.	Turn off ECDIS	
9	Simulate failure in conning display.	Not influential	Turn off Conning Display	
10	Disconnect rudder feedback.	Emits alarm by Alarm System. If the deviation between order rudder angle and actual rudder angle is 5deg or more, the Alarm System emits alarm and freezes the actual rudder angle at this time.	Remove rudder feedback input outputted to Alarm System while turning. <b>* This test is dangerous !</b>	
11	Simulate failure in Autopilot	Emits alarm by Alarm System and stops TCS function. Rudder angle is frozen at this time.	Remove power connection to autopilot while turning. <b>* This test is dangerous !</b>	
12	Simulate failure in No.1 gyro.	Not influential	Switches automatically from No.1 to No.2	
13	Check that second gyro is automatic applied in	Not influential		

	case of failure in the active gyro.			
--	-------------------------------------	--	--	--

### **6.3 Additional checklist prior to completion of TECDIS AW installation**

No.	Item	Content	Result	Remarks
1	Conning	Verify that when one of the ECDIS processors lose sensor data on one serial line, display of sensor data (relevant according to failed serial line) on conning monitor is not affected.		
2	General	Verify that installation is done according to block diagram for TECDIS AW system.		
3	General	Verify that installation is done according to functional description given for TECDIS AW system.		
4	General	Verify that required conning info according to NAUT AW requirements are displayed correctly.		
5	Gyro	Verify that requirements set forth in section 1.7 are fulfilled.		

### **6.4 Installation Notes**


### **6.5 Track-record of performed installation**

Name of vessel:	
Date of installation:	
Name of technician:	

Checklist performed:	
----------------------	--

**During all installations this checklist shall be filled in, this is for verifying a proper installation of the ECDIS system onboard.**